



Rec'd PCT/PTO 16 DEC 2004 #2  
PCT / IB 02 / 029 8-5  
12.08.02



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales

NP10.8QQ
REC'D 15 AUG 2002
WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely affects the company to certain additional company law rules.

Signed *Hechen*

Dated 24 July 2002

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Patents Form 1/77

THE PATENT OFFICE

A

The  
Patent  
Office

1/77

Patents Act 1977  
GPO

18 JUN 2002

RECEIVED BY FAX

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

18 JUN 2002

The Patent Office

Cordiff Road

Newport

Gwent NP23 5RH

18JUN02 E726666-1 D02633  
P01/7700 0.00-0213973.1

1. Your reference PH/8170

2. Patent application number  
(The Patent Office will fill in this part)

0213973.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Nokia Corporation  
Kellalahdentie 4, FIN-02150,  
Espoo, Finland.

Patents ADP number (if you know it)

7652217001

If the applicant is a corporate body, give the country/state of its incorporation

Finland

4. Title of the invention

Touch-entry User Input Device

5. Name of your agent (if you have one)

Swindell &amp; Pearson

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

48 Friar Gate,  
Derby DE1 1GY

Patents ADP number (if you know it)

00001578001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if)

Yes

a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.  
See note (d))

**Patents Form 1/77**

5. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

0

Description

6

Claim(s)

3

Abstract

0

Drawing(s)

1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 18/06/02

Swindell &amp; Pearson

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. P. Higgin - 01332 367051

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Touch-entry User Input Device

The present invention relates to a touch entry user input device. It particularly relates to a touch entry user input device located remotely from the device to which input is supplied.

Currently mobile phones have an integrated touch-entry user input, such as a keypad. A key of the keypad may have a different function depending upon the manner in which it is actuated. For example, when the phone is being used for text entry a single actuation of a key can produce a particular character and the repeated actuation of the key in rapid succession can produce different characters. Also, when the phone is in idle mode, the actuation of a key by depressing and releasing the key produces a numeric character as part of a telephone number to be dialled and the actuation of the same key by depressing the key for a duration exceeding about 1 second and then releasing it instructs the phone to dial a stored number. This is called "one-touch" dialling.

The Bluetooth (Trademark) standard describes how low power radio transceivers can be used to remotely communicate over a range of tens of metres. These low power transceiver devices are already present in some mobile phones and can be used to allow a user input (e.g. a cordless headset) to be used remotely from the mobile phone. Communication between the headset and the phone occurs between a low power radio transceiver in the headset and the low power radio transceiver in the phone. A particular advantage of Bluetooth transceivers in mobile applications is that they have energy conservation modes which prolong battery life.

It would be desirable to improve existing user input devices, in particular, touch-entry input devices comprising Bluetooth transceivers.

According to one aspect of the present invention there is provided a touch-entry user input device having a first mode in which the device does not perform a first function and a second mode in which the device does perform the first function wherein the device has means for user input and is arranged, when in the first mode, to initiate exit from the first mode and entry into the

2

second mode at the initiation of a user input.

According to another aspect of the present invention there is provided a method of transferring a user input device in response to user input from a first mode in which the device is not capable of performing a first function to a second mode in which the device is capable of performing a first function where there is an inherent delay in the transfer process, comprising the steps of: detecting the initiation of user input and then immediately initiating the transfer.

For a better understanding of the present invention reference will now be made by way of example only to the drawings in which:

Figure 1 illustrates a touch-entry user input device 2 according to one embodiment of the present invention and

Figure 2 illustrates timing.

According to the Bluetooth Standard, transceiver devices communicate by forming a piconet. A transceiver device can operate as either a Master or a Slave. When operating as a Master, the transceiver controls the piconet and the timing of the piconet is synchronised to the timing of the Master. Communication in the piconet occurs using packets in a time divided manner with only one device transmitting in any one time slot. The time slot is 625 microseconds duration. The Master assigns an Active Member Address AM\_ADDR to each Slave participating in the piconet and transmits to and receives from any one of the participating Slave devices using the appropriate AM\_ADDR. It can transmit in the even time slots and can receive in the odd time slots. When operating as a Slave, the transceiver can communicate with only the Master of the piconet. It receives in one slot and transmits in the next slot.

When a Slave is in the Active Mode, it is participating in the piconet. It has an AM\_ADDR and keeps synchronised to the Master. It continually listens to receive packets addressed to it. It can transmit packets to the Master.

When a Slave is in the Sniff Mode, it has an AM\_ADDR and keeps synchronised to the Master but is not able to transmit data to the Master. The Master sends a 'sniff' packet to the Slave once every 'sniff interval'  $T_{\text{sniff}}$ . The inventor has realised that there is a variable delay  $D$  between when a Bluetooth transceiver decides to exit the Sniff Mode and when it enters the Active Mode. The inherent variable delay  $D$  includes the variable period before the device is able to receive a 'sniff' packet (and is therefore able to transmit a message to initiate exit from the Sniff Mode) and the time taken to exit the Sniff Mode. The variable period may be as long as  $T_{\text{sniff}}$ . The time taken to exit the Sniff Mode is the time required to transmit the message to the Master and to receive a message in reply.

When a Slave is in the Park Mode, it gives up its AM\_ADDR and does not keep synchronised to the Master. It is not able to transmit data to the Master. The Master controls the Slave to move from a Park Mode to an Active Mode by transmitting an 'unpark' packet to the Slave once every 'park interval'. The Slave, while parked, regularly listens for an 'unpark' packet addressed to it and sent by the Master and in the regular 'park intervals' between these attempts is switched off. The inventor has realised that there is a variable delay  $D$  between when a Bluetooth transceiver decides to exit the Park Mode and when it enters the Active Mode. The inherent variable delay  $D$  includes the variable period before the device receives an 'unpark' packet (and is able to transmit a message to initiate exit from the Park Mode) and the time taken to exit the Park Mode. The variable period may be as long as the 'park interval'. The time taken to exit the Park Mode is the time required to transmit a reply message to the Master.

The inventor has realised that when the touch entry device is capable of discriminating between an instantaneous depression of a key and a continuous depression of a key lasting more than a threshold  $T$ , it may take the device at least the threshold  $T$  to discriminate a user input. Therefore there will be a delay between the user first making an input keystroke, when the input device is in the Sniff or Park Modes, and the response from the device to which the entry is transmitted of the threshold  $T$  (for discrimination) plus the variable delay  $D$  (for entering the Active Mode).

The inventor has developed an effective yet simple solution to the problem of a long variable delay. The delay  $D$  is made less than the threshold and a decision to exit the Sniff/Park Mode and enter the Active Mode is made before the keystroke input has been discriminated. The threshold is typically 0.8 seconds and the delay  $D$  is made less than this, for example, by setting  $T_{\text{sniff}}$  and the 'park interval' to less than 0.8 seconds and preferably 0.5 seconds. Preferably, the decision to exit the Sniff/Park Mode and enter the Active Mode is made at the beginning of the keystroke and the Active Mode is entered before the user input has been discriminated.

Figure 1 illustrates a touch-entry user input device 2 according to one embodiment of the present invention. The touch-entry user input device 2 comprises a processor 4 connected to a low power radio transceiver 6 which communicates in accordance with the Bluetooth Standard, and to a keypad 8 of user depressible keys. The touch-entry user input device 2 operates as a Slave in a Bluetooth piconet. The user can input data or commands using keystrokes on the keypad 8. The processor 4 detects and identifies each keystroke and controls the low power radio transceiver to send a radio packet comprising data identifying a keystroke to a remote device (not shown).

The touch-entry user input device 2 has a first operational mode (an energy conservation mode) in which the low power radio transceiver 6 is in the Sniff Mode or the Park Mode and is not capable of transmitting keystroke data. The touch-entry user input device 2 has a second operational mode (a radio communication mode) in which the low power radio transceiver is in the Active Mode and is capable of transmitting keystroke data.

The interval in the Park Mode is 0.5 seconds and  $T_{\text{sniff}}$  is 0.5 seconds.

The processor 4 is programmed to detect, when the device is in the first mode, the initiation (as opposed to completion) of a user input keystroke. The detection of the keystroke occurs at the same time irrespective of whether the

5

keystroke is an instantaneous depression of a key, a continuous depression of a key or a repetitive depression of a key. When the processor 4 detects the initiation of a keystroke it automatically and immediately initiates the exit from the first mode and entry into the second mode. The processor 4 initiates the exit by instructing low power radio transceiver 6 to exit the Sniff Mode or Park Mode. The low power transceiver 6 exits the Sniff Mode by transmitting a LMP\_unsniff\_req message and receiving a LMP\_unsniff\_accepted message from the Master in reply and data can be transmitted immediately. The low power transceiver 6 exits the Park Mode by receiving a LMP\_unpark\_BD\_ADDR\_req or LMP\_unpark\_PM\_ADDR\_req message from the Master. This provides an AM\_ADDR to the slave. The slave replies by transmitting a LMP\_accepted message to the Master and the Park Mode is exited.

The processor 4 is also programmed to discriminate between an instantaneous depression of a key, a continuous depression of a key and a repetitive depression of a key. A continuous depression is one lasting more than a threshold, for example 0.8 seconds. Once the keystroke has been discriminated, the processor instructs the low power radio transceiver to send a message identifying the keystroke. If the device is in the first mode when a keystroke is made, the initiation of the exit from the first mode is completed before discrimination of the user input. Preferably, the entrance into the second mode has been completed before the discrimination of the user input. Thus once the keystroke has been discriminated the message identifying it may be sent immediately

Figure 2 illustrates the timing. The trace (a) illustrates the timing of the depression of a key. The key is depressed for time  $t$  ( $t=T3-T1$ ). The trace (b) illustrates the timing of the Active Mode. The trace (c) illustrates the timing of keystroke message transmissions. At time  $T1$ , the user starts to press the key. At time  $T2$ , the touch-entry user input device 2 enters the Active Mode. At time  $T3$  the user input keystroke ends and is discriminated and a message identifying the keystroke is sent. Therefore the reaction times when using a remote touch-entry user input device are reduced. Furthermore, the time at which the message containing the keystroke is sent does not vary.



6

Although the invention has been described in the preceding paragraphs with reference to various examples, it should be appreciated that modifications and variations to the examples given can be made without departing from the scope of the invention as claimed.

Whilst endeavouring in the foregoing specification to draw attention to those features of the invention believed to be of particular importance it should be understood that the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis has been placed thereon.

## Claims

1. A touch-entry user input device having a first mode in which the device does not perform a first function and a second mode in which the device does perform the first function wherein the device has means for user input and is arranged, when in the first mode, to initiate exit from the first mode and entry into the second mode at the initiation of a user input.
2. A touch-entry user input device as claimed in claim 1 comprising detection means for detecting the initiation of a user input and control means for initiating the exit from the first mode.
3. A touch-entry user input device as claimed in claim 1 or 2 wherein the first mode is an energy conservation mode.
4. A touch-entry user input device as claimed in claim 1, 2 or 3 wherein the second mode is a low power radio communication mode.
5. A touch-entry user input device as claimed in any preceding claim wherein the means for user input comprises a user depressible key.
6. A touch-entry user input device as claimed in claim 5 comprising discrimination means for discriminating an instantaneous depression of the key from a continuous depression of the key.
7. A touch-entry user input device as claimed in any preceding claim wherein the initiation of the exit from the first mode occurs before discrimination of the user input.
8. A touch-entry user input device as claimed in any preceding claim wherein the entry into the second mode occurs before discrimination of the user input.
9. A touch-entry user input device as claimed in any preceding claim further

8

comprising low power radio transceiver means and wherein the exit from the first mode is initiated by sending a message using the low power radio transceiver means.

10. A touch-entry user input device as claimed in any preceding claim further comprising low power radio transceiver means wherein the first function comprises transmitting data using the low power radio transceiver means.

11. A touch-entry user input device as claimed in any preceding claim operating as a Slave in a Bluetooth piconet.

12. A touch-entry user input device as claimed in any preceding claim operating in accordance with the Bluetooth Standard wherein the first mode is the Sniff Mode or Park Mode

13. A touch-entry user input device as claimed in claim 12 wherein the exit from the Sniff Mode is initiated by transmitting a LMP\_unsniff\_req message.

14. A touch-entry user input device as claimed in claim 12 or 13 wherein the exit from the Park Mode is initiated by transmitting a LMP\_accepted message.

15. A touch-entry user input device as claimed in any preceding claim operating in accordance with the Bluetooth Standard wherein the second mode is the Active Mode.

16. A touch-entry user input device as claimed in any preceding claim wherein the time taken to exit from the first mode and enter into the second mode is less than the time taken to discriminate a user input.

17. A touch entry user input device substantially as hereinbefore described with reference to and/or as shown in the drawings.

18. A method of transferring a user input device, in response to user input, from a first mode in which the device is not capable of performing a first function to a second mode in which the device is capable of performing a first

9

function where there is an inherent delay in the transfer process, comprising the steps of:  
detecting the initiation of user input and then immediately initiating the transfer.

19. A method of change operational modes of a touch entry user input device substantially as hereinbefore described with reference to and/or as shown in the drawings.

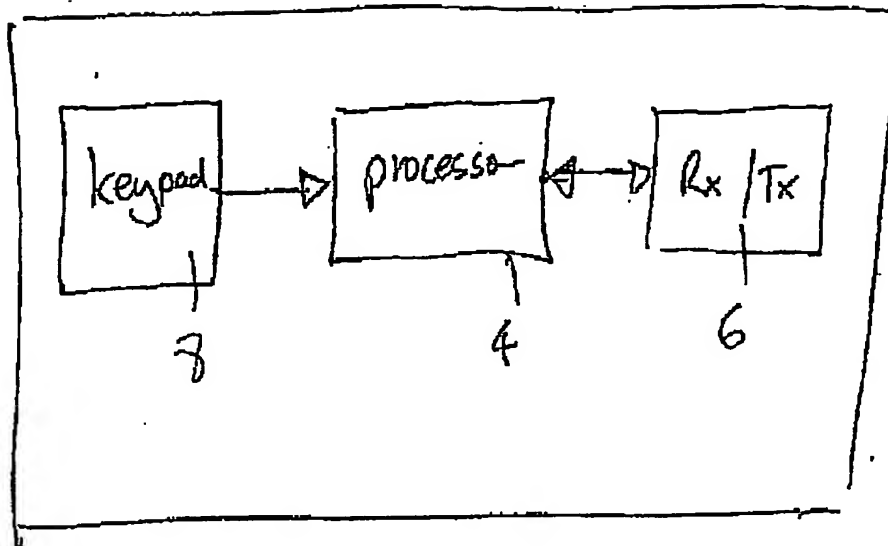


Fig 1.

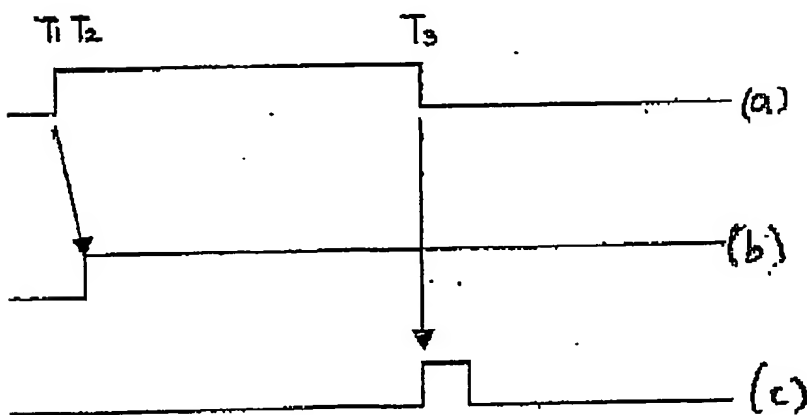


Fig 2.

✓/1

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**